

Manifold COMFORT LT

The manifold consists of a supply and return branch made of stainless-steel profiles with wall brackets.

Flow line:


- 2-12 pieces of integrated flow regulators. Flow meters have a memory function. Preset hydraulic values are retained after closing and opening the heating system, visible scale, 0-5 l/min.
- 2-12 pieces of connectors $\frac{3}{4}$ " with Eurocone
- 1 piece of plug 1" for venting, filling, emptying and rinsing $\frac{3}{4}$ "
- swivel connector 1" on the primary side

Povrat vod:

- 2-12 M30x1.5 protective cap, onto which actuators can be mounted
- 2-12 pieces of connectors $\frac{3}{4}$ " with Eurocone
- 1 piece of plug 1" for venting, filling, emptying and rinsing $\frac{3}{4}$ "
- swivel connector 1" on the primary side

2 pcs of brackets, wall-mounted, galvanized / sound-insulated, connection possible on the left and right side.

Packed in a carton box.

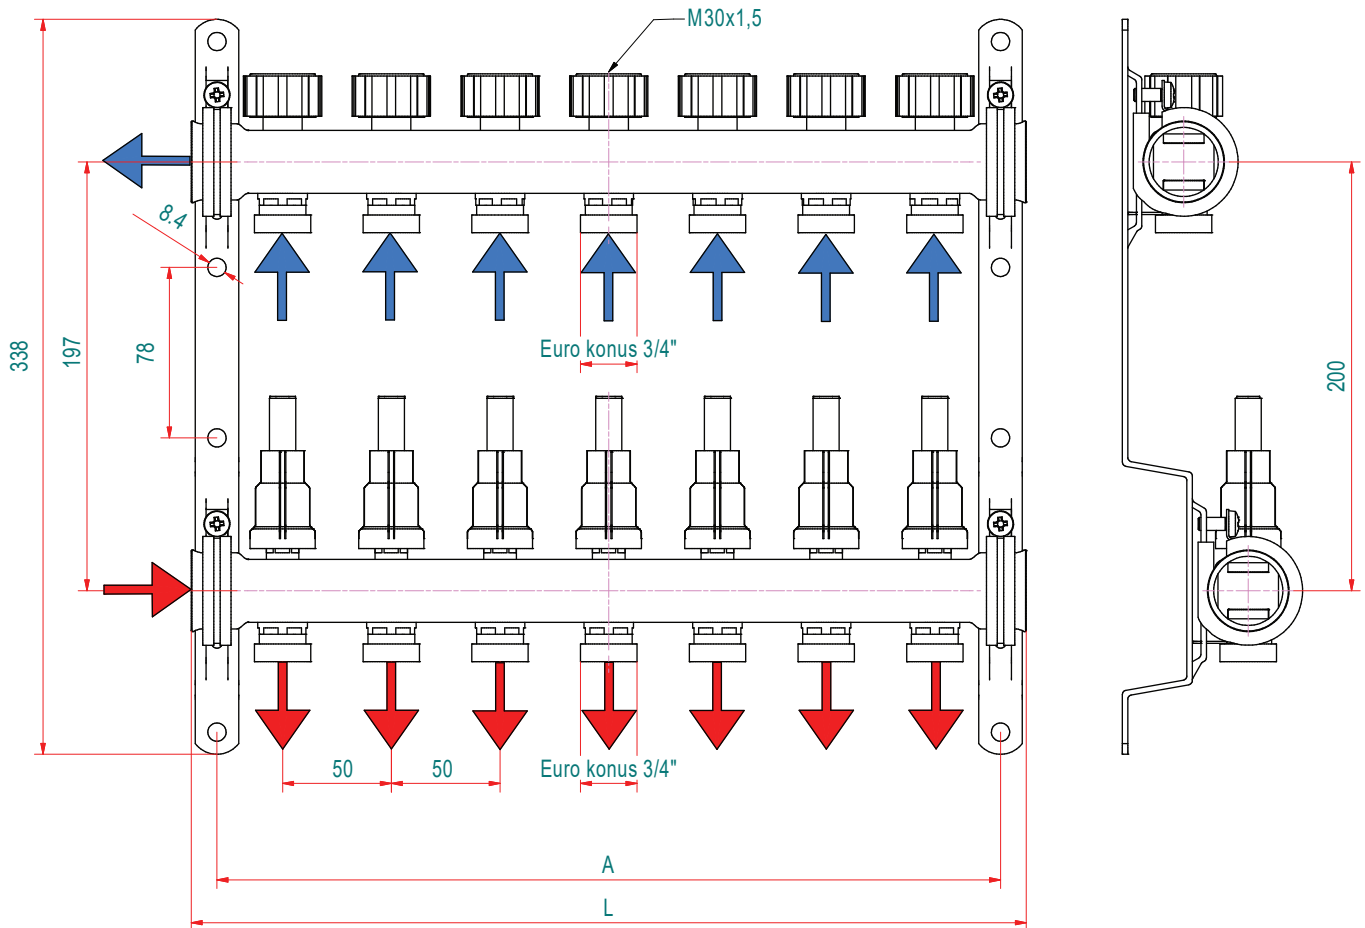

Tmax	90°C
p max (test)	10 bar
p operating	6 bar
H ₂ O	100%
Glycol	max 50%

No.	2	3	4	5	6	7	8
L [mm]	125	175	225	275	325	375	425
A [mm]	110	160	210	260	310	360	410
No.	9	10	11	12			
L [mm]	475	525	575	625			
A [mm]	460	510	560	610			