

# Manifold SUPERIOR LT

The manifold consists of a supply and return branch made of stainless-steel profiles with wall brackets.

## Flow line:


- 2-18 pieces of integrated flow regulators. Flow meters have a memory function. Preset hydraulic values are retained after closing and opening the heating system, visible scale, 0-5 l/min.
- 2-18 pieces of connectors  $\frac{3}{4}$ " with Eurocone
- 1 piece of plug 1" for venting, filling, emptying and rinsing  $\frac{3}{4}$ "
- swivel connector 1" on the primary side

## Return line:

- 2-18 M30x1.5 protective cap, onto which actuators can be mounted
- 2-18 pieces of connectors  $\frac{3}{4}$ " with Eurocone
- 1 piece of plug 1" for venting, filling, emptying and rinsing  $\frac{3}{4}$ "
- swivel connector 1" on the primary side

**2 pcs of brackets, wall-mounted, galvanized / sound-insulated, connection possible on the left and right side.**

**Packed in a carton box.**

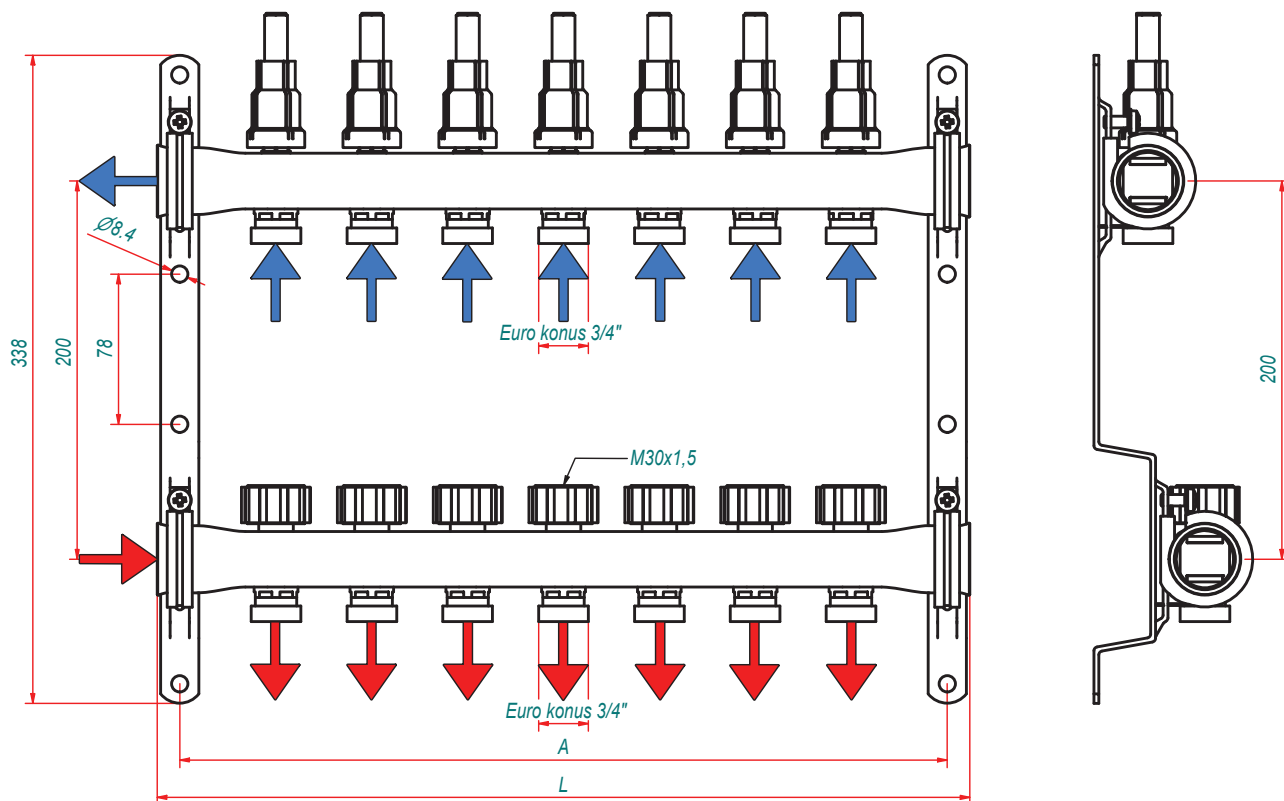

Tmax	90°C
p max (test)	10 bar
p operating	6 bar
H <sub>2</sub> O	100%
Glycol	max 50%

No.	2	3	4	5	6	7	8	9	10	11
L [mm]	150	200	250	300	350	400	450	500	550	600
A [mm]	125	175	225	275	325	375	425	475	525	575
No.	12	13	14	15	16	17	18			
L [mm]	650	700	750	800	850	900	950			
A [mm]	625	675	725	775	825	875	925			